

Fulcrum* Thermoplastic Composite Products are produced with a proprietary rigid engineering thermoplastic polyurethane matrix. The combination of ductile thermoplastic matrix with high strength continuous fibers results in excellent strength and stiffness combined with superior toughness. The resin offers excellent resistance to a broad range of chemicals, including acids, bases and organic liquids.

The following data, comparing pultruded Fulcrum* Composite with a pultruded composite with a Vinyl Ester matrix was tested by Dow Chemical.

Test Specimens:



- Fulcrum* samples pultruded, 75% uniaxial roving, section 2mm x 22mm, standard Fulcrum* resin
 - » Initial strength 142 kpsi, initial modulus 5.9 mpsi
- VE samples pultruded, 80w% uniaxial roving, section 2mm x 22mm, D 640-900 resin
 - » Initial strength 203kpsi, initial modulus 7.7 mpsi

All specimens immersed in test solutions at 120F, all specimens edge sealed



Notes for use

This data is supplied for information purposes only. It represents the performance of a single set of test specimens under a single set of test conditions and is not necessarily indicative of all configurations. As with all composite products the performance in the final application is influenced by a number of factors including – load, duration, temperature, environment. It remains the responsibility of the end user to determine the suitability of these products under end use conditions. This data was tested on samples with no external coating. Fulcrum* may have a cap layer of unfilled polymer applied during production. This cap layer can further enhance properties, including chemical resistance.


% Property Retained
Resistance to Bases

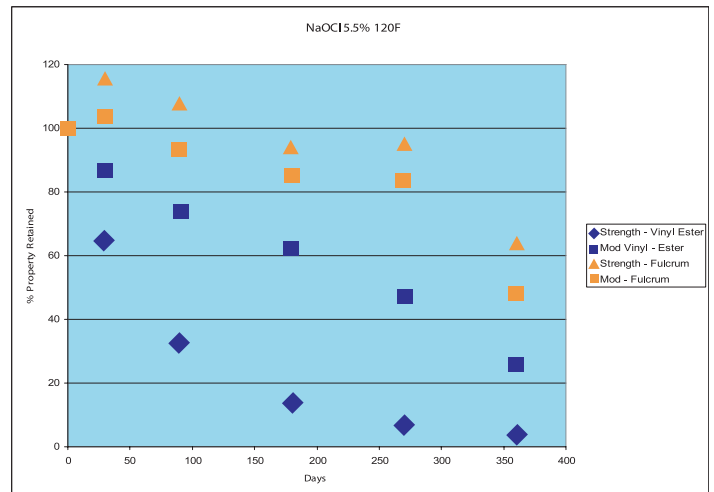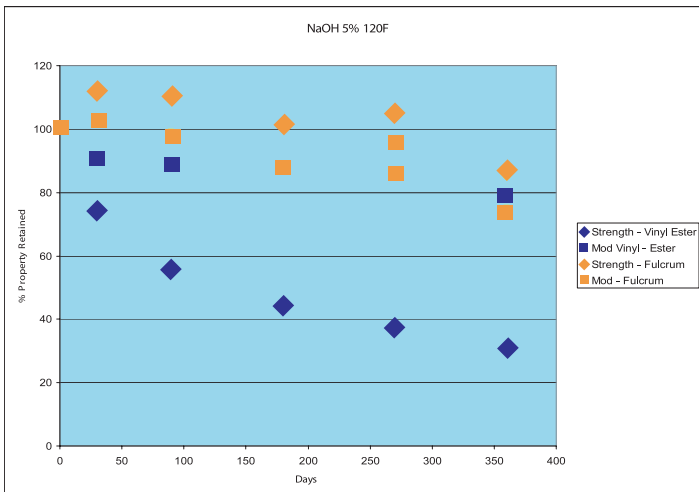


Acids

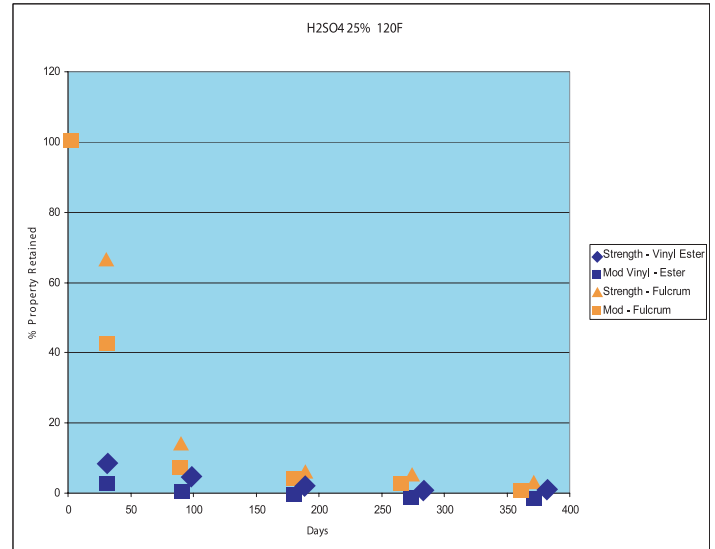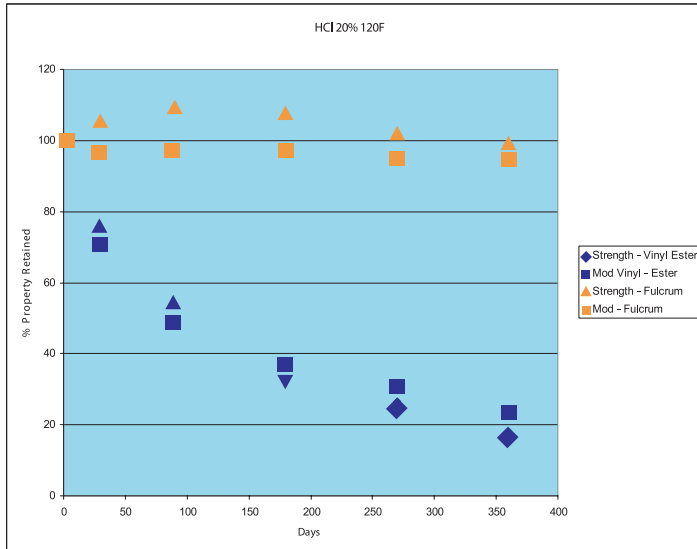

Organic Solvent

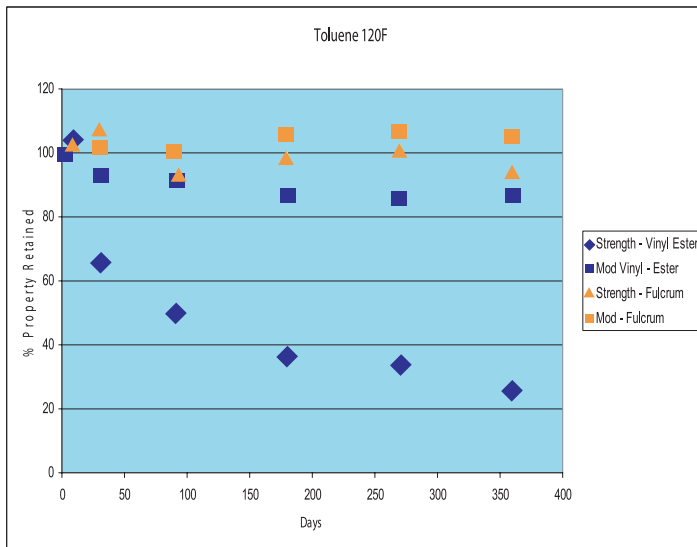

Water

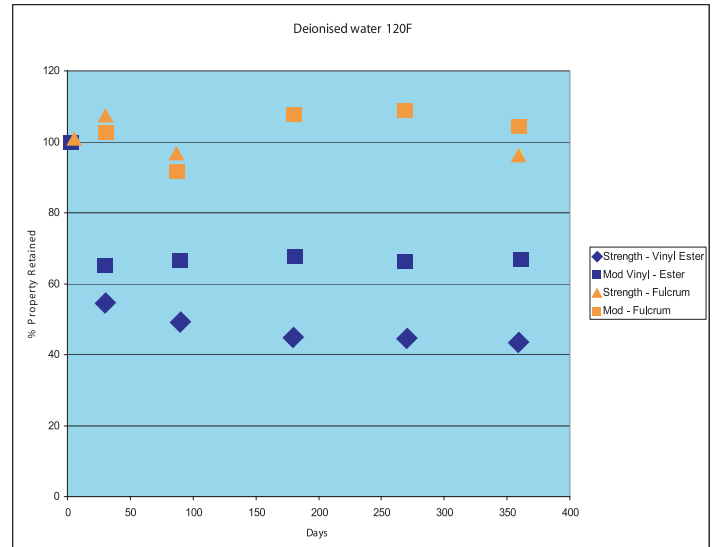

* Fulcrum is a trademark of Fulcrum Composites, Inc.

FULCRUM COMPOSITES, INC.
 1407 East Grove Street
 Midland, MI 48640
 Tel: +1 989 636 1025
 Fax: +1 989 837 1566
 info@fulcrumcomposites.com
 www.fulcrumcomposites.com

TOP GLASS S.p.A.
 Via dei Soldani, 3 - I - 23875 Osnago (LC)
 Tel +39 039 95223.1 - Fax +39 039 587787
 info@topglass.it - www.topglass.it

